


Cable Hanger Data Sheet

Manufactured in mild steel. Hot dipped galvanised after manufacture. Special designs available on request e.g. Girder hanging, 90° Twist, side by side cables. Used to hang cables on walls or support structures.

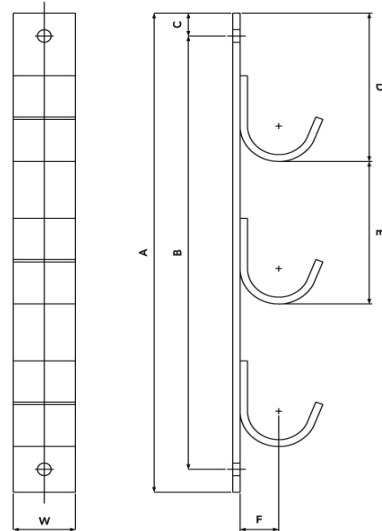

Part No.	Cable Dia. mm	Ways	Dimensions mm						Material Size mm		Fixing Holes Dia. mm	Pack Qty	Weight g	SWL* Kg
			A	B	C	D	E	F	W	Thickness				
CH1W1	Up to 50	1	145	105	20	105	n/a	37	40	6	11	1	500	200
CH2W1	Up to 50	2	235	195	20	105	90	37	40	6	11	1	900	200
CH3W1	Up to 50	3	325	285	20	105	90	37	40	6	11	1	1300	200
CH4W1	Up to 50	4	415	375	20	105	90	37	40	6	11	1	1700	200
CH5W1	Up to 50	5	505	465	20	105	90	37	40	6	11	1	2100	200
CH6W1	Up to 50	6	595	555	20	105	90	37	40	6	11	1	2500	200
CH1W2	51-75	1	170	130	20	130	n/a	50	50	6	13	1	820	250
CH2W2	51-75	2	295	255	20	130	125	50	50	6	13	1	1480	250
CH3W2	51-75	3	420	380	20	130	125	50	50	6	13	1	2240	250
CH4W2	51-75	4	545	505	20	130	125	50	50	6	13	1	2980	250
CH5W2	51-75	5	670	630	20	130	125	50	50	6	13	1	3710	250
CH6W2	51-75	6	795	755	20	130	125	50	50	6	13	1	4440	250
CH1W3	76-100	1	185	145	20	145	n/a	62	50	6	13	1	980	250
CH2W3	76-100	2	345	305	20	145	160	62	50	6	13	1	1900	250
CH3W3	76-100	3	505	465	20	145	160	62	50	6	13	1	2820	250
CH4W3	76-100	4	665	625	20	145	160	62	50	6	15	1	3600	250
CH5W3	76-100	5	825	785	20	145	160	62	50	6	15	1	4660	250
CH6W3	76-100	6	985	945	20	145	160	62	50	6	15	1	5600	250

* Load Capacity: The recommended safe working load for individual hooks is detailed above. Brackets with multiple hook configurations are designed to operate with all hooks carrying their maximum load.