



ELLIS

Holding Power

DATA SHEET

INDUSTRIAL CABLECLAMP

- USED TO FIX POWER CABLES FOR INDOOR AND OUTDOOR APPLICATIONS
- CLAMP DEFORMS OPEN TO ACCEPT THE CABLE AND IS THEN CLOSED WHEN FIXED DOWN
- MANUFACTURED AS STANDARD IN BLACK LLDPE (B) OR IN A LONDON UNDERGROUND APPROVED MATERIAL (LUL)
- DETAILED DRAWINGS CAN BE SUPPLIED ON REQUEST

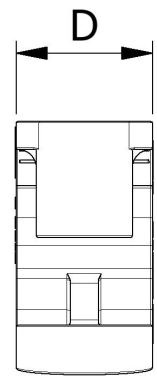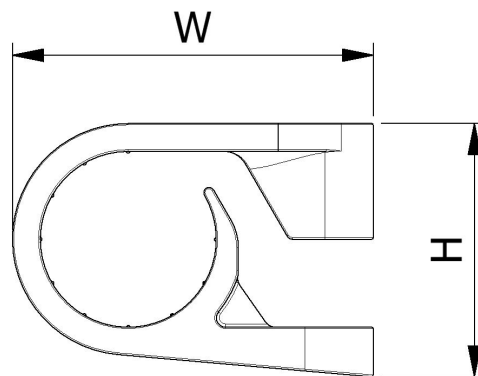

PART NO.		CABLE ϕ RANGE (mm)		DIMENSIONS (mm)			FIXING HOLES	PACK QTY.	SWL (kgf)	WEIGHT (g)	
LLDPE	LUL	MIN	MAX	W	H	D				LLDPE	LUL
17-01B	17-01LUL	10	15	27.8	17.6	12	1 x M4	100	18	2.0	3.5
17-02B	17-02LUL	12	17	32.0	20.8	14	1 x M4	100	24	3.3	5.4
17-03B	17-03LUL	15	20	37.1	25.3	16	1 x M4	100	32	5.2	8.6
17-04B	17-04LUL	18	24	41.0	29.6	18	1 x M4	100	39	7.3	12.2
17-05B	17-05LUL	22	29	52.1	35.4	20	1 x M6	50	52	11.2	18.6
17-06B	17-06LUL	26	34	58.2	40.9	22	1 x M6	50	66	16.5	27.9
17-07B	17-07LUL	32	42	69.3	49.2	25	1 x M6	25	79	25.6	42.9
17-08B	17-08LUL	39	51	81.7	58.5	26	1 x M6	25	93	36.2	60.1

LONDON UNDERGROUND

The LUL version of this clamp is compliant with the requirement of London Underground Standard 1-085. Product Register No. 365.